

# OSONE HS ML 1002

## 10.4" TFT LCD Monitor with BNC Input

OSMOSIS IRELAND LTD. UNIT 30, CLONSHAUGH BUSINESS & INDUSTRIAL PARK, CLONSHAUGH, DUBLIN 17.  
TEL: 01 852 3600 FAX: 01 852 3625 WEB: WWW.OSMOSIS.IE EMAIL: SECURITY@OSMOSIS.IE

### Feature

- High resolution / High contrast
- Picture in Picture and PIP Audio can be selectable
- Fast response time
- Scale mode (full / under / over / 4:3 / 16:9)
- AV1 / AV2 / S-Video / VGA selectable
- 3D Comb Filter / 3D De-interface
- Remote control for easy accessibility operation
- VESA 75mm x 75mm mount standard




### Specification

Model	HS-ML1002
Button Control	Power / OSD Control / Source
Display Resolution (Dot)	640 x 480 @ 60
Active Area (mm)	211.2(H) x 158.4(V)
Dot Pitch (mm)	0.33 x 0.33mm
LCD Profile Ratio	4:3
Display Color	262144
Brightness (Central)	350cd/m <sup>2</sup> (*1)
Contrast Ratio	300 :1 Typ
Viewing Angle	Left 70° / Right 70° / Up 40° / Down 70° CR>10
Response Time	60ms
Input Voltage	DC12V In
Input Signal	1Vp-p composite video
Input Impedance	75 ohm
Output Impedance	75 ohm (Auto Termination)
<b>Operating System</b>	
NTSC	525 lines, 60 fields / sec
PAL	625 lines, 50 fields / sec
<b>Connection</b>	
VGA Input	15 pin D-SUB connector x 1
Video Input/ Output	BNC x 2 / BNC x 2 Looping Output Auto Termination
Audio Input/ Output(L/R)	RCA Jack x 2 / RCA Jack x 2
S-Video Input	4-pin DIN connector x 1
Speaker	1W + 1W
Power Consumption	17W
Weight	N.W./ G.W.: 1.86kg / 2.9kg
Dimension	261(W) x 63(D) x 223(H)mm
Operating Temperature	-10 to 50°C (14 to 122°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Certification	CE / FCC

(\*1) The brightness spec. is from panel spec. Design and Specifications are subject to change without notice.

### Dimension

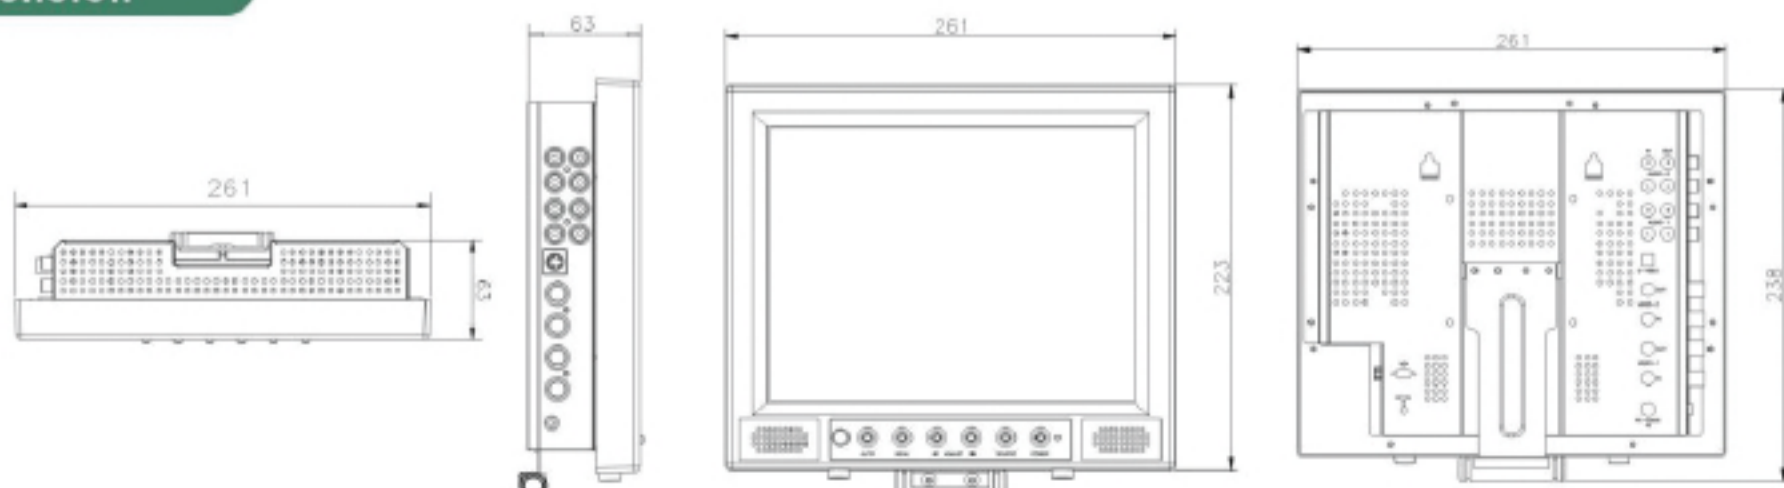

Specifications subject to change without notice.